

PVC  
FRPVC SWA FRPVC (red stripe)  
LHPVC SWA LHPVC (blue stripe)


F4CC... Primary group code  
...111 Finish code  
...212

Copper 12 Core  
600/1000 V  
SANS 1507

Size code	...naaa...	A910	A915	A925	A004
Conductor size	mm <sup>2</sup> nom	1	1.5	2.5	4
Conductor diameter	mm app.	1.3	1.6	2	2.5
Insulation diameter	mm app.	3	3.5	4	4.5
Bedding diameter	mm app.	13.5	15	16.5	21
Armour diameter	mm app.	16.5	17.5	19	24
Cable diameter	mm app.	19.5	20.5	22.5	27
Cable mass	kg/m app.	0.8	0.9	1.1	1.5
Gross mass ( 500 m )	kg app.	440	510	660	910
Bending radius	mm min.	195	205	235	280
Resistance					
dc @ 20°C	Ω/km max	18.1	12.1	7.41	4.61
ac @ 70°C	Ω/km max	21.66	14.48	8.87	5.52
Reactance	Ω/km	0.116	0.11	0.103	0.103
Capacitance	μF/km	0.275	0.315	0.375	0.376
Impedance	Ω/km	21.657	14.478	8.867	5.517
(Single Phase) Volt Drop	mV/A/m	43.31	28.96	17.73	11.03

Last updated May 2006

When ordering please quote: primary + size + finish code  
e.g. F4CC A910 111

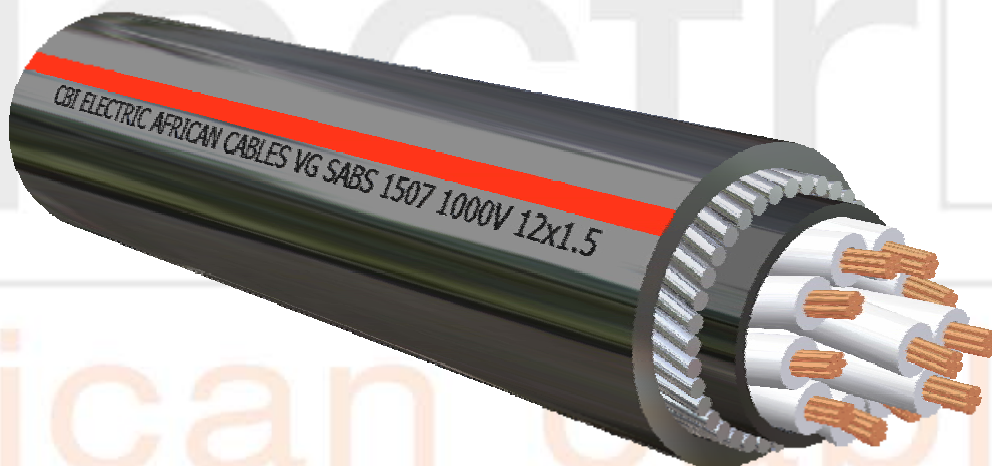

POWER BY INNOVATION... INNOVATION THROUGH PARTNERSHIPS

A member of the REUNERT Group

**CBI Electric African Cables**  
PO Box 172, Vereeniging 1930 • Tel: +27 16 430 6000 • Fax: +27 16 423 6103  
www.cbi-electric.com • afcab@cbi-electric.com

