

PVC
FR PVC SWA FR PVC (red stripe)
LH PVC SWA LH PVC (blue stripe)

F4CC... Primary group code
...111 Finish code
...212


Copper 4 Core
600/1000 V
SANS 1507

Size code	...naaa...	4915	4925	4004	4006	4010	4016
Conductor size	mm ² nom	1.5	2.5	4	6	10	16
Conductor diameter	mm app.	1.7	2.2	2.5	3.0	4.0	5.0
Insulation diameter	mm app.	3.5	4.0	5.0	5.5	6.0	7.0
Bedding diameter	mm app.	9.5	10.5	12.5	14.0	16.0	19.0
Armour diameter	mm app.	12.0	13.0	15.0	16.5	18.5	21.5
Cable diameter	mm app.	15.0	16.0	18.0	19.5	21.5	25.0
Cable mass	kg/m app.	0.5	0.6	0.7	0.9	1.1	1.5
Gross mass (500 m)	kg app.	365	390	455	565	715	915
Bending radius	mm min.	150	160	180	195	215	250
Current rating							
In ground	Amps	23	31	40	51	68	88
In ducts	Amps	20	26	34	43	58	75
In air	Amps	20	26	36	45	62	82
Resistance							
dc @ 20°C	Ω/km max	12.10	7.41	4.61	3.08	1.83	1.15
ac @ 70°C	Ω/km max	14.48	8.87	5.52	3.69	2.19	1.38
Reactance							
Capacitance	μF/km	0.334	0.398	0.386	0.450	0.542	0.649
Impedance	Ω/km	14.478	8.867	5.517	3.687	2.192	1.379
Zero Sequence							
Resistance	Ω/km	29.53	22.90	17.68	15.38	12.56	10.24
Reactance	Ω/km	0.16	0.15	0.14	0.13	0.12	0.12
Short circuit ratings							
Symmetrical	kA (1sec)	0.2	0.3	0.5	0.8	1.3	2.0
Earth fault	kA (1sec)	1.4	1.4*	1.9	2.0	2.4	2.8
(Three Phase) Volt Drop	mV/A/m	25.08	15.36	9.56	6.38	3.79	2.39

Last updated May 2006

When ordering please quote: primary + size + finish code
e.g. F4CC 4915 111

* Earth fault rating limited by symmetrical fault rating

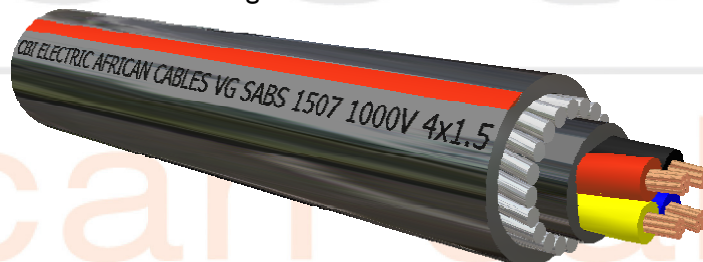

POWER BY INNOVATION... INNOVATION THROUGH PARTNERSHIPS

A member of the REUNERT Group

CBi Electric African Cables
PO Box 172, Vereeniging 1930 • Tel: +27 16 430 6000 • Fax: +27 16 423 6103
www.cbi-electric.com • afcab@cbi-electric.com

